


Skived PTFE Film

PTFE sheet and film are manufactured from virgin PTFE resins which are molded, sintered, and skived to the appropriate thickness. Both sheet and film are widely used in a number of industries due to the material's outstanding characteristics, including heat and chemical resistance, dielectric strength and anti-stick properties. Sheet and film may also be chemically etched on one or both sides for bondability.

T-100 is a skived, virgin grade PTFE sheet. It is available in thicknesses ranging from 0.0115" to 0.25" and in widths of 12", 24", 36", and 48". PTFE film is supplied either in sheet or continuous roll form. Slit widths are available in thicknesses ranging from 0.001" to 0.062" and to the exacting tolerances of the wire and cable, and electronic industries.

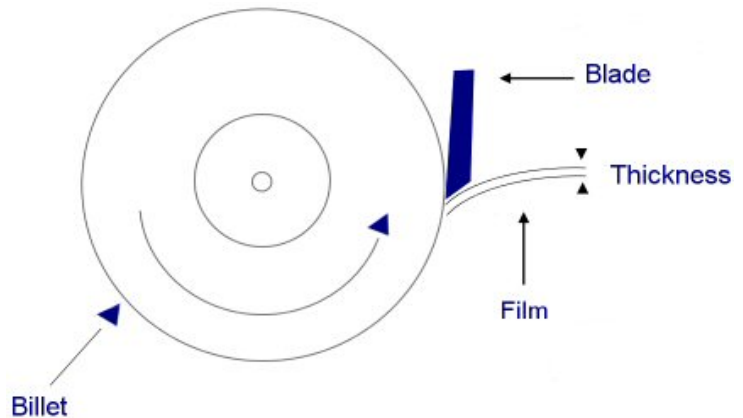

Skiving involves the removal of material from a rotating billet by use of a blade. The pressure of the blade determines the material thickness.

T-200 is a mechanical grade PTFE sheet manufactured from reground PTFE. It is available in thicknesses ranging from 0.015" to 0.250" and standard widths of 12", 24", 36", 48", and 60". T-200 is supplied in either sheet or continuous roll form. This sheet is a cost effective alternative to virgin grade and is ideal for use as a gasket and bearing surface or whenever virgin grade PTFE is not required. Mechanical grade sheet may also be etched on one or both sides for bondability. Other thicknesses available upon request, please call 800.637.6694 for more information.

Features/Benefits:

- Outstanding heat & chemical resistance
- High dielectric strength
- Can be chemically etched for bondability

Typical Applications Include:

- Laminate release sheets
- Wire & cable wrap
- Industrial gasketing

Andrew Roberts Inc. is a leading converter and fabricator of high performance coated fabrics tapes & belts. Our converting capabilities include:

Die Cutting - Slitting - Sheeting - Heat Sealing - Sewing

Skived PTFE Film *(continued)*

PTFE Sheet and Film— T-100 Virgin and T-200 Mechanical Grade Products

T-100 Virgin Skived Film

Thickness	inches	.001	.002	.003	.005	.006	.010
Tolerance	+/- inches	.0001	.0003	.0003	.0003	.0003	.0005
Tensile Strength	Minimum psi	3000	3000	3000	3500	3500	4000
Elongation	% Minimum	200	200	200	300	300	300
Dielectric Strength	VPM	3000	3000	2600	2000	2000	1700

Other thicknesses available upon request. T-100 film meets the requirements of MIL-P-22241B, Type II, Grade A and other appropriate AMS and ASTM specifications.

T-100 Virgin Skived Sheets

Thickness	inches	.015	.031	.062	.125	.188	.250
Tolerance	+/- inches	.001	.0015	.005	.007	.009	.010
Tensile Strength	Minimum psi	4000	4000	4000	3500	3500	3500
Elongation	% Minimum	300	300	300	300	300	300
Dielectric Strength	VPM	1500	1200	700	—	—	—
Weight	lbs/ft ²	.18	.38	.76	1.53	2.30	3.00

Other thicknesses available upon request. T-100 film meets the requirements of MIL-P-22241B, Type II, Grade B and other appropriate AMS and ASTM specifications.

T-200 Mechanical Grade Sheets

Thickness	inches	.015	.031	.062	.125	.188	.250
Tolerance	+/- inches	.001	.002	.005	.007	.010	.010
Tensile Strength	Minimum psi	2400	1900	1600	1500	1500	1500
Elongation	% Minimum	175	150	125	100	100	200
Weight	lbs/ft ²	.18	.38	.76	1.53	2.30	3.00

Other thicknesses available upon request. T-200 sheet meets the physical requirements of AMS 3651C.

Important Note to Purchaser: Values shown are typical and are not to be used for specifications.

All data is subject to change without notice. Before using, the user should determine the suitability of the product for its intended use, and the user assumes all risk and liability in connection therewith. Specifications subject to change without notice.

Andrew Roberts Inc. is a leading converter and fabricator of high performance coated fabrics tapes & belts. Our converting capabilities include:

Die Cutting - Slitting - Sheeting - Heat Sealing - Sewing